



## Industrial & Hydraulic Hoses

ERIKS is a worldwide leading supplier of industrial and hydraulic hoses, couplings and accessories. Your choice for safe, reliable and leak-proof systems.

### ERIKS, a specialized industrial service provider

ERIKS supplies hoses and compensators from renowned manufacturers in rubber, plastic, PTFE and stainless steel. If the product you are looking for is not available as standard, we will search together with our specialists and our producers for a suitable solution for your application.

ERIKS industrial and hydraulic hoses is the foremost supplier and market leader to the process industries and our employees are undisputed specialists in the field of hoses, couplings and compensators.

## Our product range:

### Industrial hoses

- Rubber hoses
- PTFE hoses
- Plastic hoses
- Protection hoses
- Metal hoses
- Hose clamps
- Hose couplings
- Compensators
- Instrumentation
- Spare parts and accessories
- Spiral hoses
- Steel wire braided hoses
- Textile reinforced hoses
- Thermoplastic hoses
- High pressure cleaning hoses
- Fuel hoses
- Hose protection
- Fuel hose fittings
- Interlock crimp fittings
- Standard crimp fittings



ERIKS industry hoses and couplings



Hoses for oil terminal



Special hydraulic hoses and piping


### A range of trusted brands



## Industrial & Hydraulic Hoses



# Hoses Assembly Facility



- Rubber Expansion Joint**
- Wide range of possible media and material
  - Excellent vibration absorption
  - Also available on Fabric



- Metal Hose**
- Annularly Corrugated with one or two Braid
  - Extreme Temperature
  - High Pressure/ Vacuum
  - Excellent Life Cycle
  - Minimum effort to bend or flex
  - Aggressive media



- Couplings and Fittings**
- Threaded Connections
  - Flange Couplings
  - Quick Connection Couplings
  - Triclamp
  - Cam & Groove



- Rubber and Thermoplastic Hose**
- Air
  - Nitrogen
  - Chemical
  - Food & Beverage
  - Multipurpose
  - Oil/Petroleum
  - Steam



- Hydraulic Hoses and Assembly**
- Higher Impulse Life
  - Minimum Bending Radius
  - Abrasion Resistance Cover
  - Ozone Resistance
  - Rubber & Thermoplastic



- Hydraulic Hose Inserts and Fittings**
- Quality Assured
  - Type Approved
  - Standard and Interlock
  - NPT/BSP/JIC/ORFS/SAE



- Metal Expansion Joint**
- Exhaust Expansion Joint
  - Absorb Axial and Angular Movement
  - Ideal for Vibration Absorption
  - Double Lateral Expansion Joint




- PTFE Expansion Joint**
- Excellent Chemical resistance
  - Multi Applications
  - FDA approved

# Industrial & Hydraulic Hoses


# ERIKS

## Flexible Metal Hoses and Fittings


Available in - SS304, SS304L & SS316L




Female / Male BSPT Thread




DIN 11851 / SMS Union



Tri-Clamp Ferrule



Camlock Couplings

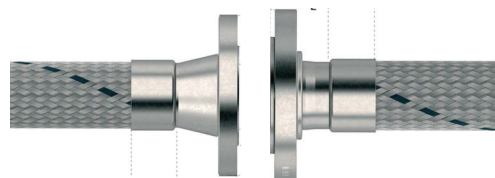

ASME B16.5 Flange (Swivel/Fixed)

### Applications include:

- Cryogenic Gas
- Steam
- Glycol
- Bitumen
- Oil
- Chemical
- Food
- Water & many more

### Mechanical Strength

- High working pressures
- High braid coverage

### Ergonomics


- More flexibility and ease of use due to the design of the corrugated hose and braid

### Temperature Correction Factor

When hoses are required to work at higher temperatures, the working pressure given in **Table 1** should be multiplied by the correction factor. This will determine the pressure rating of the hoses for higher temperatures. The permissible working pressure is  $30 \times 0.60 = 18.0$  bar.

Recommended design pressure of SS316L DN50 Hose with single wire braiding at 200 degree Celsius will be 18.0 bar.

# Stainless Steel Hose



Temperature Correction Factor for Hose System FT - Table 1

Material	Temperature											
	20	50	100	150	200	250	300	350	400	450	500	550
De-rating factors												
SS304L	1	0.87	0.72	0.65	0.59	0.55	0.51	0.48	0.46	0.45	0.44	0.43
SS304	1	0.88	0.73	0.66	0.60	0.56	0.52	0.50	0.48	0.47	0.46	0.42
SS321	1	0.92	0.88	0.78	0.74	0.71	0.67	0.64	0.62	0.61	0.60	0.59
SS316L	1	0.88	0.74	0.67	0.62	0.58	0.54	0.52	0.50	0.48	0.47	0.47
SS316	1	0.90	0.78	0.71	0.66	0.62	0.58	0.56	0.53	0.52	0.51	0.51



ISO 10380 QUALIFIED  
Inner Tube: SS316L

Annular, Stainless Steel & Standard Pitch Hose  
Braid: SS304

Temp. Range: 196° to +550°C

Nominal Hose Size (Inch)	Braid Layers	Nominal Outside Diameter (mm)	Nominal Inside Diameter (mm)	Min. Centreline Bending Radius (mm)		Pressure Rating at 23°C (kg/cm <sup>2</sup> )		Weight (kg/mtr)
				Static	Dynamic	Max. Working	Nominal Burst Pressure	
1/4	0	9.6	6.2	25	85	12	140	0.076
	1	10.8				120	480	0.150
	2	12				192	68	0.240
3/8	0	14.3	10.3	38	140	9	100	0.112
	1	15.5				90	360	0.215
	2	16.7				144	576	0.333
1/2	0	16.7	12.2	45	140	9	90	0.118
	1	17.9				80	320	0.240
	2	19.1				128	512	0.379
3/4	0	26.8	20.2	70	170	6	65	0.250
	1	28.3				96	256	0.495
	2	29.8				154	410	0.630
1	0	32.2	25.4	85	190	5	55	0.355
	1	33.7				75	200	0.630
	2	35.2				120	320	0.930
1 1/2	0	49.5	40.1	130	300	1	45	0.682
	1	51.1				35	140	1.172
	2	52.7				56	224	1.694
2	0	60.3	50.3	160	320	1	45	0.880
	1	62.3				30	120	1.606
	2	64.3				48	192	2.383
3	0	95.0	80.3	200	450	0.6	35	1.098
	1	97.0				18	72	2.154
	2	99.0				29	115	3.260
4	0	117.0	100.8	290	560	0.5	28	1.401
	1	119.0				16	64	3.001
	2	121.5				26	102	4.665
6	0	175.0	150.8	380	815	0.3	22	3.220
	1	177.5				10	40	5.705
	2	180.0				16	64	8.289
8	0	225.0	197.0	500	1015	0.3	18	4.850
	1	228.0				8	32	9.150
	2	231.0				13	51	13.620
10	0	278.0	250.4	620	1270	0.2	18	7.150
	1	281.5				7.5	30	13.750
	2	285.0				12	48	20.550

For the high temperature and pressure, please refer to temperature correction factor

# ERIKS APAC Locations

## **ERIKS Pte Ltd**

8 Tuas Loop  
Singapore 637344  
T +65 6272 2405  
F +65 6274 1706  
E [salessg@eriks.com](mailto:salessg@eriks.com)  
W [www.eriks.com.sg](http://www.eriks.com.sg)

## **ERIKS Sdn Bhd**

**Head office:**  
**Operation Department**  
No. 14, Jalan Utarid U5/14  
Seksyen U5, 40150 Shah Alam  
Selangor, Malaysia  
T +603 7846 0280 Ext 110  
F +603 7847 2050  
E [sales@eriks.com.my](mailto:sales@eriks.com.my)  
W [www.eriks.com.my](http://www.eriks.com.my)

## **ERIKS (Shanghai) Fluid Technology Co., Ltd.**


No.3 Building,  
No.329 Cheyang Rd.,  
Songjiang District, 201611  
Shanghai, China  
T +86 21 5773 3110  
F +86 21 5773 3119  
E [infosh@eriks.cn](mailto:infosh@eriks.cn)  
W [www.eriks.cn](http://www.eriks.cn)

## **Penang branch:**

No. 13 & 15, Jalan Limbungan Indah,  
Taman Limbungan Indah,  
12100 Butterworth,  
Penang, Malaysia  
T +604 310 3210/211/212/213/216  
F +604 310 3214  
E [sales@eriks.com.my](mailto:sales@eriks.com.my)  
W [www.eriks.com.my](http://www.eriks.com.my)

## **East coast branch:**

K-428 Ground Floor,  
Taman Kemaman,  
24000 Kemaman,  
Terengganu Darul Iman,  
Malaysia  
T +609 859 6431  
F +609 859 6429  
E [sales@eriks.com.my](mailto:sales@eriks.com.my)  
W [www.eriks.com.my](http://www.eriks.com.my)

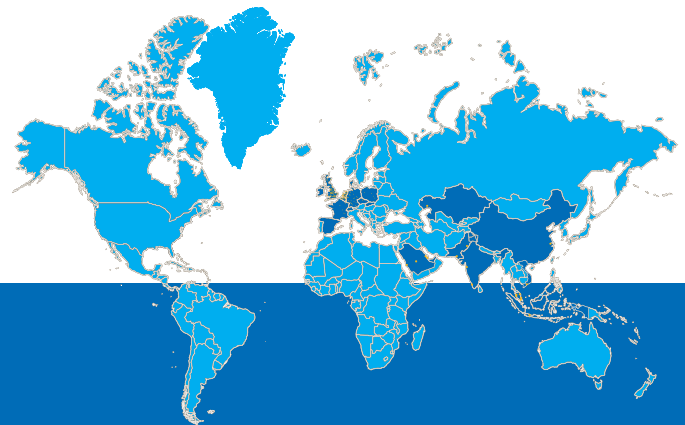

[www.eriks.com](http://www.eriks.com) | [www.eriks.com.sg](http://www.eriks.com.sg) | [www.eriks.com.my](http://www.eriks.com.my)

Let's make industry work better

**ERIKS**

# **ERIKS**

Let's make industry work better